

QUAD 405-2


APPLICATION SHEET NO. 1

Quad 405-2 power amplifier in single channel operation

The outputs of the Quad 405-2 can be connected in series or parallel to produce a single channel power amplifier capable of delivering in excess of 200 watts into high (12-16Ω) or low (4Ω) impedance loads.

The accompanying graph shows the output characteristics of the Quad 405-2 in either configuration.


A. Outputs wired in parallel

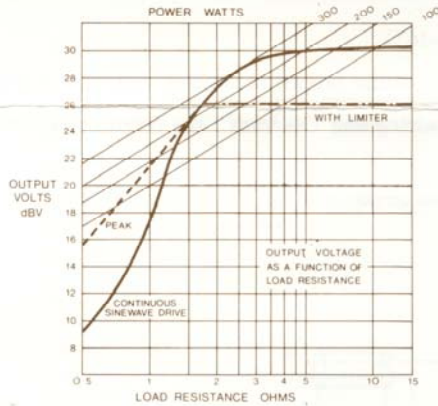

Power output 200 watts into 4Ω.


The input level to each channel must be adjusted by a pre-set potentiometer so that the output from each channel is identical to ensure accurate load sharing. Diagram 1 shows the input wiring arrangement.

PRESET POTENTIOMETER 5KΩ LIN

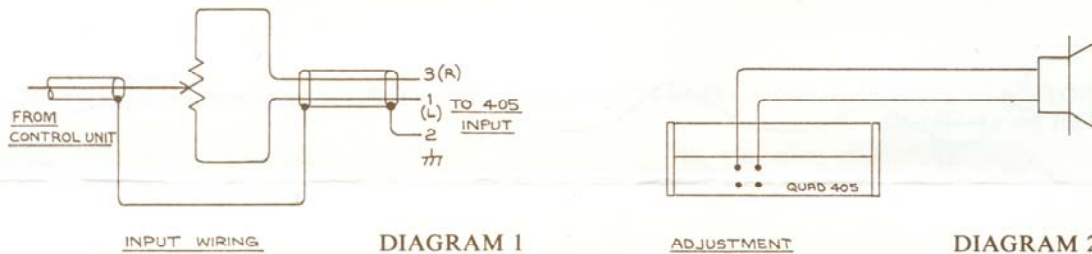

INPUT WIRING

DIAGRAM 1

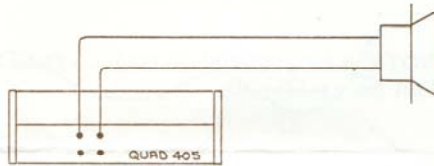


ADJUSTMENT

DIAGRAM 2

For initial adjustment the loudspeaker is connected as shown in Diagram 2. A signal is fed to the input of the amplifier. The potentiometer is adjusted until there is zero output from the loudspeaker and then sealed.

The loudspeaker is then connected as shown in Diagram 3 and the amplifier is ready for use.

OPERATION

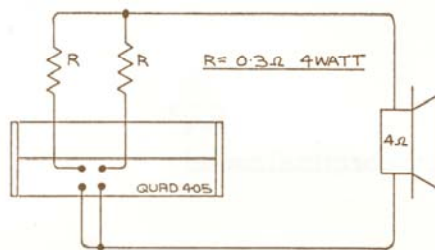

OUTPUT WIRING

DIAGRAM 3